


Product Features

1. High precision and high frequency stability
2. Excellent thermal coupling between thermistor and crystal
3. Application in mobile communication
4. RoHS and REACH Compliant , Pb-free , Halogen-free
5. Industry Standard Package :
2.0*1.6*0.65 mm (OY Series)

Application :

- Smart phone
- Modem
- GPS



Test condition

Ambient temperature : $25 \pm 5^{\circ}\text{C}$




Relative humidity : 40% ~ 70%

● Table 1 . Electrical Specifications

Parameters	Symbol	Min.	Typ.	Max.	Units	Notes
Nominal Frequency	F	19.2 , 26 , 38.4			MHz	
Frequency Tolerance	FT	± 10			ppm	@25°C±3°C
Frequency Stability Over Operating Temp. Range (Reference 25°C)	ST	± 12			ppm	@-30~85°C
Operating Temperature	Topr	-30	25	85	°C	
Load Capacitance	CL	7 , 8 or specify			pF	
Drive Level	DL	-	100	200	uW	
Equivalent Series Resistance	ESR	-	-	80	Ohm	19.2MHz
		-	-	50		26 、 38.4MHz
Aging	-	± 0.7			ppm	1st Year
Thermistor Resistance (25 °C)	-	100k $\pm 1\%$			Ohm	
B-Constant (25-50 °C)	-	4250 $\pm 1\%$			K	The B constant is calculated using the zero-power resistance values measured at 25°C and 50°C

Note : The table shows common spec. if you have special spec. requirement , please feel free to contact our salesperson.

■ **DIMENSIONS (Unit : mm)**

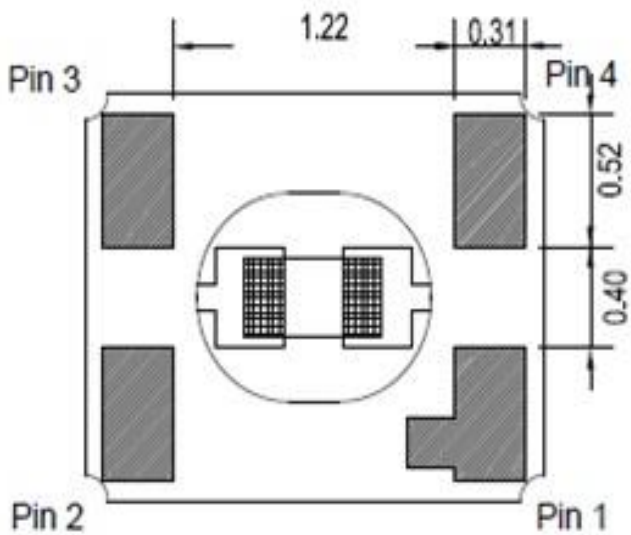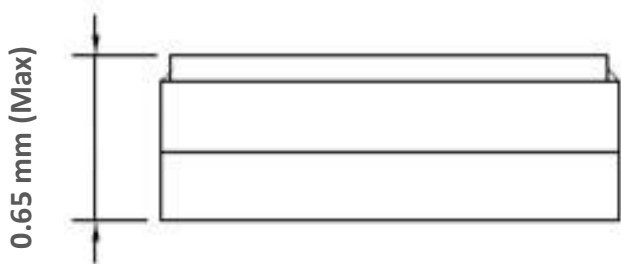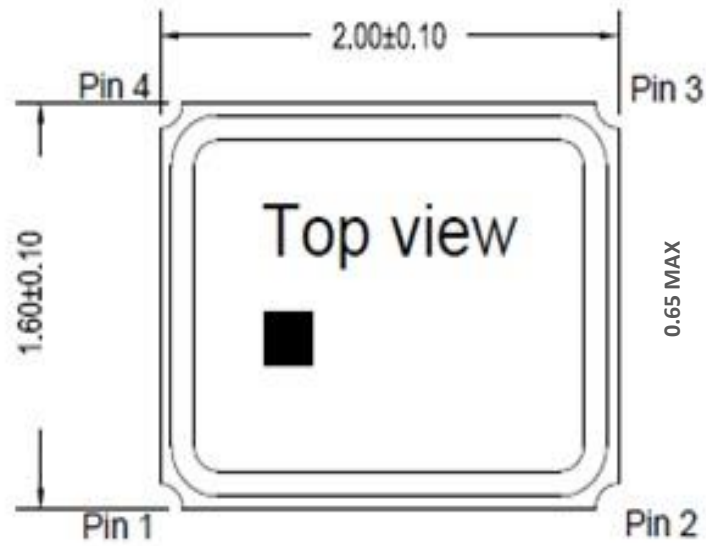


■ **PIN FUNCTION**

	Symbol	Function
Pin 1	XT1	XTAL Terminal 1
Pin 2	RT2	Thermistor Terminal 2
Pin 3	XT2	XTAL Terminal 2
Pin 4	RT1	Thermistor Terminal 1

Note:


Pin 2 is connected to the metal lid and thermistor
Pin 4 is connected to the thermistor only

■ **BLOCK DIAGRAM**

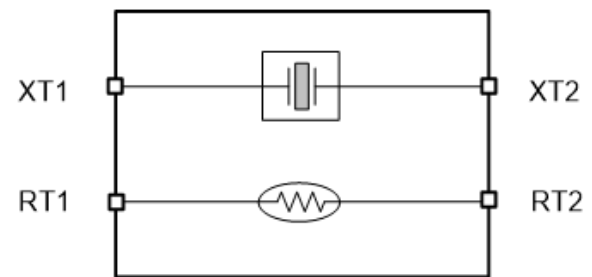

Note: RT2 shall be connected to GND is recommended

■ **SUGGESTED LAYOUT**

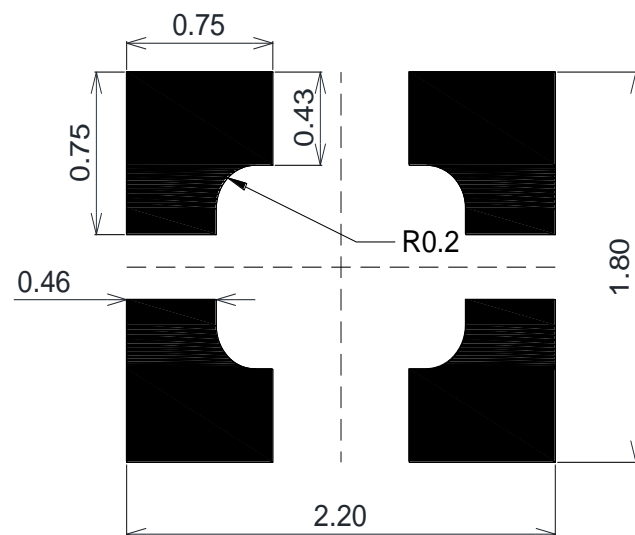

(Unit : mm)